




Calippo Slush 'Self Fill' Electrical Instructions 2017

Dati tecnici / Technical data		I-PRO1	I-PRO2	I-PRO3
Vasca coibentata I-TANK™ Insulating Bowl I-TANK™	num	1	2	3
Capacità (prodotto finito) Capacity (finished product)	l	11	11+11	11+11+11
Coperchio - Cover		Illuminato luce fredda LED - LED-based cold lighting		
Sistema di raffreddamento - Cooling system		Aria - Air		
Tastiera - Control board		Capacitiva - Capacitive		
Modalità mantenimento - Defrost mode		Automatica/Manuale - Automatic/Manual		
Accessori (non in dotazione) Accessories (not included)		Autofill Pre/Post Mix		
Gas refrigerante - Refrigerating gas		R 404 a		
Dimensioni (LxPxA) Dimensions (WxDxH)	cm	20X58X87	40X58X87	60X58X87
Peso netto - Net weight	kg	39	60	81
Voltaggio standard - Standard voltage	V/Hz	230/50		

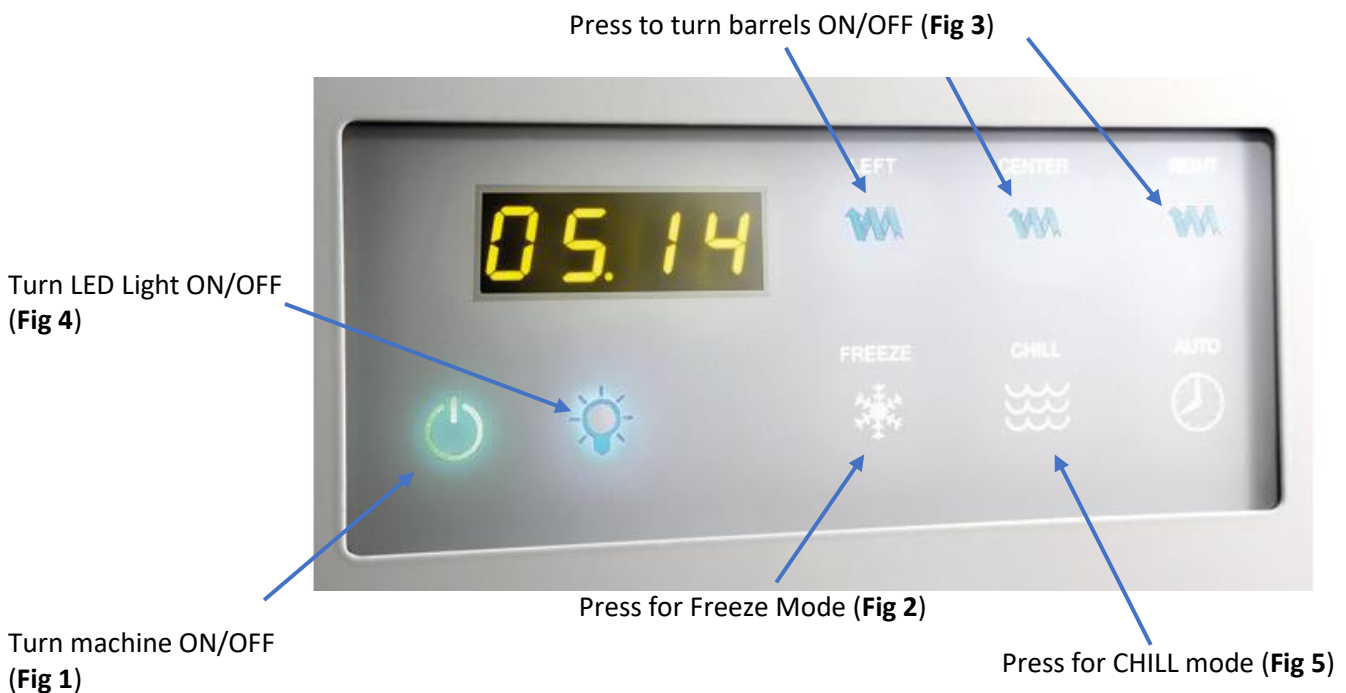

Machine should now be placed in correct position BY delivery driver.

1. Plug machine in to electricity supply and turn ON by the main socket
2. Mix the syrup/water (1:5 ratio) and pour into the barrel
3. Turn the machine on by the control pad (Fig 1)
4. Turn on 'Freeze mode' (Fig 2)
5. Turn all barrels ON to rotate (Fig 3)
6. Leave Mix in machine until it is ready to serve (1.5 hrs)
7. Turn LED light on (Fig 4)
8. Ready to Serve!!!
9. Press CHILL MODE on panel to leave overnight/outlet is closed (Fig 5)