

**Thank you for purchasing a Rumba 10/13 cabinet.**

This guide is designed to ensure you get the optimum performance from your Rumba 10/13 cabinet at all times.

By positioning and operating the cabinet correctly and then following a few steps to look after it, your Rumba 10/13 cabinet will run properly and efficiently.



Rumba 13



Rumba 10

### Positioning Your Cabinet

- The cabinet should be positioned on a flat, level surface.
- A 5cm gap must be left between all sides of the cabinet and the wall or any other fixture or fittings. The grille at the rear of the cabinet must also be unobstructed at all times to allow continual airflow.

5cm gap all around



### Operating Your Cabinet

- The cabinet should be left to stand for 4 hours after delivery before being plugged in for the first time.
- The cabinet should be plugged into a suitable 13 amp electrical supply. It should be plugged directly into the mains supply socket and **not attached** to an extension lead or adaptor.
- It will take approximately 24 hours for the cabinet to get down to the required temperature. Product should not be put inside the cabinet until temperature has been reached.
- Once plugged in and switched on at the mains supply socket it will begin to work. **Please note** that there is no on / off switch.

## Operating Your Cabinet continued...

- The light switch is located on the rear panel underneath the controller.
- Always keep the serving hatch closed when not serving, this will aid performance.
- Product from the storage cupboard can be placed in the tempering area below the displayed product. This will temper the product to the correct temperature for serving. Please note that 5.5 litre Napoli pans cannot be double stacked.



## Temperature Adjustment

- If the correct temperature is not being maintained then adjustments to the cabinet can be made.
- The controller is located on the lower right rear of the cabinet and can be adjusted by pressing the **SET** button. When **SET** is seen in the screen press **SET** again and adjust temperatures by pressing the up and down arrows, once the desired temperature is on the screen the controller will lock this in automatically, simply leave it.




## Looking After Your Cabinet

- **Health & Safety:** Before checking and cleaning the condenser the unit should be isolated by unplugging it
- The condenser should be checked monthly, and if needed cleaned by a suitably qualified person.
- To clean the condenser: Isolate the power supply to the cabinet and remove the rear grille. Using a soft brush or vacuum cleaner very carefully clean the dust or debris from the condenser. Once cleaned replace the grille and switch the power supply back on.



## Looking After Your Cabinet - Defrost

- When ice begins to build up on the inside of the cabinet (approximately 1cm or ½ an inch thick) this indicates that defrosting is required. This should be carried out at least once every six months.
- Place a tray under the storage cupboard drain hole and remove the internal plug.
- Never use sharp implements to scrape the ice as this may damage the cabinet refrigeration.
- When the ice has melted and drained away dry off any residual moisture with a soft cloth.
- Replace the drain plug.
- Plug back in and switch on. Restock when the cabinet has returned to the correct temperature. Please note it may take several hours to do this.

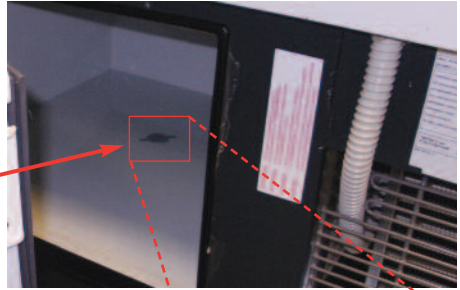

### Extra Defrosting

- To start an extra defrost, simply press the manual defrost button located on the underside of the rear control panel for 5 seconds.

## Problem Solving

In the unlikely event that your cabinet is not operating to its optimum performance, you are responsible for ensuring that the following basic checks have been carried out **before** calling out an engineer.

### Cabinet not running correctly:

1. Check the electrical supply.
2. Check the fuse in the mains plug is OK.
3. Check the Controller has not lowered or turned off.
4. If the cabinet is plugged into an extension lead, unplug it and plug directly into the mains supply.

### Cabinet is not at the correct temperature:

1. Check that a good air space has been left around the cabinet.
2. Check the cabinet is not near a heat source.
3. Check the lids / doors have not been left open.
4. Check the load line has not been exceeded.
5. Check that the controller has been set correctly.
6. Check if there is a build up of ice inside.
7. Check the condenser grille is not blocked with dust or debris.

Your light tube(s) will eventually need replacing and you will need to purchase a new one.

Rumba: Front 36w T8 Daylight Top 30w T8 Daylight  
Light tubes are available from The Light Bulb Co. Tel: 01869 362 222

### Warranty

Your cabinet is supplied with a 12 month parts and labour warranty to protect you against manufacturers defects. If you need assistance please call:

### Wall's Refrigeration Solutions Customer Service Department on 0161 366 2500

In order to log a service call you will need to provide the serial number for the cabinet at fault. This can be found on the information plate that is located on the back of the cabinet. Use this space to make a note of the serial number for future reference using a ball point pen:

**SERIAL NUMBER**

Please note that the basic checks detailed in this guide are usually excluded from the warranty. See standard terms and conditions for further information.

**Non-warranty calls will be charged for.**

If you are in any doubt contact our Customer Services Department.

### Cabinet Contents Insurance

Please note that your cabinet warranty excludes any liability for loss of product or your insurance excess no matter how caused.

We recommend that you check your Store Policy to ascertain if you are covered for such an eventuality and if not then take separate insurance.

It is recommended that you run your cabinet for 24 hours before placing stock inside.

---

### Waste Electrical & Electronic Regulations (WEEE)

In accordance with the WEEE regulations, Wall's Refrigeration Solutions is responsible for the final disposal of all equipment purchased on or after the 13th August 2005 - customers will be charged for the distribution costs at the time of collecting the unit.

For equipment purchased before 13th August 2005 Wall's Refrigeration Solutions will make a commercial charge on the customer which covers both the disposal of the unit(s) and the associated distribution costs.

