

# Quick Start Guide

## Slimline Maxivision II

Thank you for purchasing a Slimline II Maxivision cabinet.

This guide is designed to ensure you get the optimum performance from your Slimline Maxivision II at all times.

By positioning and operating the cabinet correctly and then following a few steps to look after it, your Slimline Maxivision II will run properly and efficiently.




Slimline  
Maxivision II

### Positioning Your Cabinet

- The cabinet should be positioned on a flat, level surface and the levelling feet wound down.
- A 5cm gap must be left between the sides and rear faces of the cabinet and the wall or any other fixture or fittings. The side and rear grilles must be kept unobstructed at all times.
- Please note the cabinet will not perform in ambient temperatures over 35°C.
- Site the cabinet away from external sources of heat, eg. radiators, direct sunlight etc.

5cm gap all around

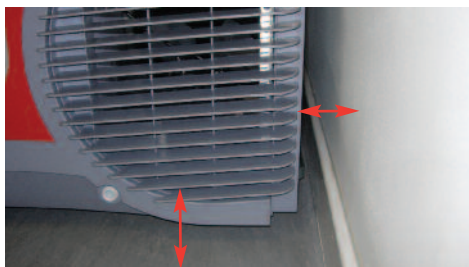


### Operating Your Cabinet

- The cabinet should be left to stand for 4 hours after delivery before being plugged in for the first time.
- The cabinet should be plugged into a suitable 13 amp electrical supply. It should be plugged directly into the mains supply socket and **not attached** to an extension lead or adaptor.
- It will take approximately 24 hours for the cabinet to get down to the required temperature. Ice Cream should not be put inside the cabinet until temperature has been reached.
- Once plugged in and switched on at the mains supply socket it will begin to work. **Please note** that there is no on / off switch.

## Operating Your Cabinet continued...

- This cabinet is not designed to be able to freeze liquid, eg. ice pops. These should be frozen before putting them in.
- Do not exceed the load line on the inside of the cabinet. Doing so will result in reduced performance of your cabinet.
- Always keep lids closed whenever possible.

### DO NOT EXCEED LOAD LINE LEVEL



## Rear Control Panel - Temperature Adjustment



Thermostat control for middle and bottom sections


Light Switch

Thermostat control for top section

- If the correct temperature is not being maintained then adjustments to the cabinet can be made.
- There are two thermostats situated on the rear control panel. The right hand thermostat controls the top section, and the left hand thermostat controls the middle and bottom sections of the cabinet.
- Adjust the temperature by turning the dial 1 increment clockwise to go colder or anti-clockwise to go warmer.
- Leave the cabinet for 2 hours and then check the temperature again. Repeat this process if more adjustment is required.
- The light switch for the cabinet is situated on the rear control panel as illustrated.

## Looking After Your Cabinet

- **Health & Safety:** Before checking and cleaning the condenser the unit should be isolated by unplugging it.
- Even though this cabinet is fitted with a low maintenance condenser that should not require cleaning for long periods of time it should still be inspected at least once a year for signs of any substantial dust or debris build up.
- **Caution:** Before removing the compressor housing cover, always isolate the unit by completely removing the plug from the power supply. All work on the electrical system and the refrigeration system must be performed by suitably qualified staff.
- To clean the condenser isolate the power supply to the cabinet and remove the rear grille. Using a soft brush or vacuum cleaner very carefully clean the dust or debris from the condenser. Once cleaned replace the grille and switch the power supply back on.

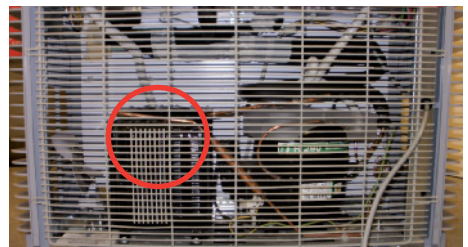

## Looking After Your Cabinet - Defrost

- When ice begins to build up on the inside of the cabinet (approximately 1cm or ½ an inch thick) this indicates that defrosting is required. This should be carried out at least once every six months.
- Empty the cabinet of all products, isolate the unit by completely removing the plug from the power supply, open all lids / doors.
- Place a tray under the external drain hole and remove the external & internal plugs.
- Never use sharp implements to scrape the ice as this may damage the walls.
- When the ice has melted and drained away dry off any residual moisture with a soft cloth.
- Refit the drain plug, plug back into power supply and close all lids. Please note that it may take up to 24 hours for the cabinet to get back down to temperature.

## Problem Solving

In the unlikely event that your cabinet is not operating to its optimum performance, you are responsible for ensuring that the following basic checks have been carried out **before** calling out an engineer.

### Cabinet not running correctly:

1. Check the electrical supply.
2. Check the fuse in the mains plug is OK.
3. Check the thermostat has not been lowered or turned off.
4. If the cabinet is plugged into an extension lead, unplug it and plug directly into the mains supply.

### Cabinet is not at the correct temperature:

1. Check that a good air space has been left around the cabinet.
2. Check the cabinet is not in direct sunlight.
3. Check the lids / doors have not been left open.
4. Check the load line has not been exceeded.
5. Check the thermostat has been set correctly.
6. Check if there is a build up of ice inside.
7. Check the condenser grille is not blocked with dust or debris.
8. Check the cabinet is not near a heat source e.g. radiators etc.

Your light tube will eventually need replacing and you will need to purchase a new one.

14w T5 Daylight Light tubes are available from The Light Bulb Co. Tel: 01869 362 222



## Quick Start Guide

---

### Slimline Maxivision II

#### Point of sale

Wall's ice cream branded point of sale is available from P.O.S. Direct. **Tel: 0845 600 6612**

#### Warranty

Your cabinet is supplied with a 12 month parts and labour warranty to protect you against manufacturers defects. If you need assistance please call:

#### Wall's Refrigeration Solutions Customer Service Department on 0845 127 2527

In order to log a service call you will need to provide the serial number for the cabinet at fault. This can be found on the information plate that is located on the back of the cabinet. Use this space to make a note of the serial number for future reference using a ball point pen:

**SERIAL NUMBER**

Please note that the basic checks detailed in this guide are usually excluded from the warranty. See standard terms and conditions for further information.

**Non-warranty calls will be charged for.**

If you are in any doubt contact our Customer Services Department.

#### Cabinet Contents Insurance

Please note that your cabinet warranty excludes any liability for loss of product or your insurance excess no matter how caused.

We recommend that you check your Store Policy to ascertain if you are covered for such an eventuality and if not then take separate insurance.

It is recommended that you leave your cabinet switched on for 24 hours before placing stock inside.

---

#### Waste Electrical & Electronic Regulations (WEEE)

In accordance with the WEEE regulations, Wall's Refrigeration Solutions is responsible for the final disposal of all equipment purchased on or after the 13th August 2005 - customers will be charged for the distribution costs at the time of collecting the unit.

For equipment purchased before 13th August 2005 Wall's Refrigeration Solutions will make a commercial charge on the customer which covers both the disposal of the unit(s) and the associated distribution costs.



Unilever UK Ltd, Unit 2A, East Tame Business Park,

Rexcine Way, Talbot Road, Hyde, Cheshire, SK14 4GX Phone: 0845 127 2527 Fax: 0161 366 7374

Sales enquiries: [sales@wallsrefrigerationsolutions.com](mailto:sales@wallsrefrigerationsolutions.com) Service enquiries: [service@wallsrefrigerationsolutions.com](mailto:service@wallsrefrigerationsolutions.com)

[www.wallsrefrigerationsolutions.com](http://www.wallsrefrigerationsolutions.com)